

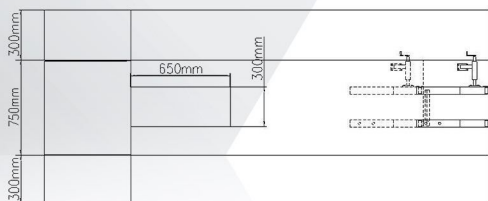


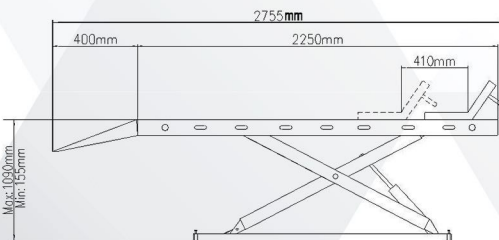

Designed and Engineered
IN THE USA

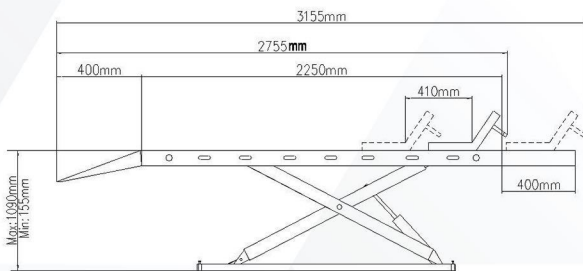

FEATURES


- 600kg (1300 Lb.) Capacity
- Electric hydraulic control / Automatic safety lock activating
- Skid proof diamond platform
- Removable rear cover is convenient for rear wheel changing
- Quick removable approach ramps
- Adjustable wheel vise installing to extend axle base up to 410mm (16 1/8")
- Optional lifting jack: perfect for wheel removal
- Optional width extension kit: with 600mm (23 5/8") extra width on platform
- Optional length extension kit: with 400mm (15 3/4") extra length on the platform for the long axle vehicle single-point release device
- Double "S" shape columns to increase the columns strength
- Commercial double safety locks
- Skid proof diamond platform
- Powerside column can be installed at each corner 220V single phase power unit
- Designed portable, it can be moved easily by using caster kits
- 5-Year structure, 2-year hydraulic warranty

SPECIFICATIONS

Model	Lifting Capacity	Lifting Height	Lifting time	Overall Length (Inc. Ramp)	Runway length	Overall Width	Min. Height	G.W	Motor
RMCL-600	600 kg	1090mm	23 Sec	2755mm	2250mm	750mm	155mm	250 kg	1.5HP

LIFTS INCLUDE THE FOLLOWING

Front wheel vise

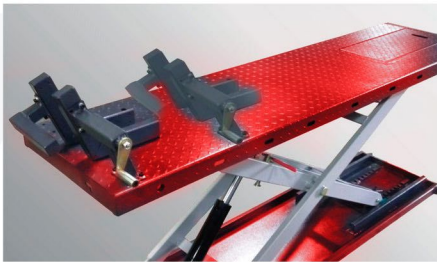

Adjusted front wheel vise with adjustable distance 410mm. For TMCL-600 only.

Vehicle tighten belt



Tighten vehicle before lifting, shipped as standard. Kits No. #MC006

Rear tire removal cover



Removable platform cover plate is convenient for rear wheel changing

OPTIONAL

Lifting jack




Lifting capacity: 500kg
Perfect for wheel removal

Width extension kit



Adding 600mm extra width on platform to be suitable for three or four-wheel motorcycle Kits for RMCL-600: #MC001, MC-450: #MC003

Length extension kit

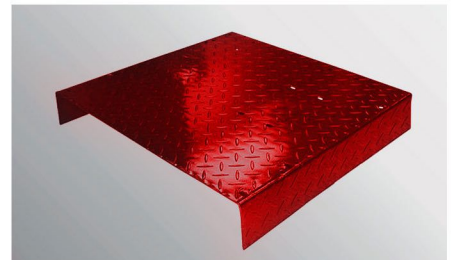

Add 400mm extra length on the platform for the long axle vehicle.
Kits for RMCL-600: #MC002, MC-450: #MC004