





Designed and Engineered
IN THE USA



Dual synchronous cylinders



The RSX-7 is equipped with the safety stop device at the height of 300mm, both control buttons are needed to lower down the lift from 300mm to ground with tone alarm for safety.

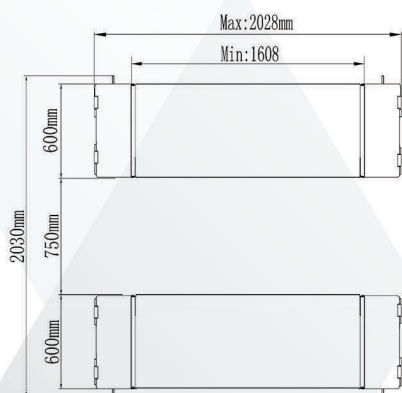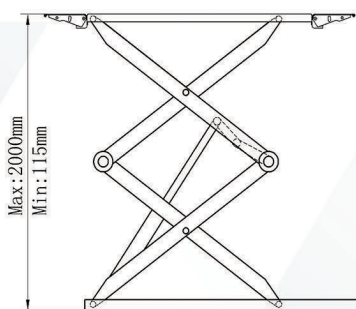

FEATURES

- 2-Dual synchronous cylinders are applied to assure the lifting level on both platforms
- Automatic safety device controlled electrically. No air needed
- Hydraulic safety locks system instead of The mechanical safety locks
- Hydraulic equalization for easy access between ramps
- Electrical control system operated by Up or Down button
- Low profile design. The closed height is only 115mm

Model	Lifting Capacity	Lifting Time	A		B	C	D	E	Gross Weight	Motor
			Lifting Height	Minimum Height	Runway Length	Width Between Runways	Runway Width	Overall Length (Inc. Ramps)		
RSX-7	3.0 t (7,000 lbs)	40 Seconds	2000mm (78 3/4")	115mm (4 1/2")	1608mm (63 1/4")	750mm (29 1/2")	600mm (23 5/8")	2028mm (79 3/4")	875Kg (1,929 lbs)	2.0/3.0HP